



UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No.

862.2893

First Named Inventor or Application Identifier

BUNGO SHIMADA, ET AL.

Express Mail Label No.

Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO:

☒ Fee Transmittal Form
(Submit an original, and a duplicate for fee processing)

Specification Total Pages

3. ☒ Drawing(s) (35 USC 113) Total Sheets

4. ☒ Oath or Declaration Total Pages

a. ☐ Newly executed (original or copy)

b. ☒ Unexecuted for information purposes

c. ☐ Copy from a prior application (37 CFR 1.63(d))
(for continuation/divisional with Box 17 completed)
[Note Box 5 below]

i. ☐ **DELETION OF INVENTOR(S)**
Signed Statement attached deleting
inventor(s) named in the prior application,
see 37 CFR 1.63(d)(2) and 1.33(b).

5. ☐ Incorporation By Reference (useable if Box 4c is checked)
The entire disclosure of the prior application, from which a copy of
the oath or declaration is supplied under Box 4c, is considered as
being part of the disclosure of the accompanying application and is
hereby incorporated by reference therein.

6. ☐ Microfiche Computer Program (Appendix)

7. Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all necessary)

a. ☐ Computer Readable Copy

b. ☐ Paper Copy (identical to computer copy)

c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

8. ☐ Assignment Papers (cover sheet & documents)

9. ☐ 37 CFR 3.73(b) Statement (when there is an assignee) ☐ Power of Attorney

10. ☐ English Translation Document (if applicable)

11. ☒ Information Disclosure Statement (IDS)/PTO-1449 ☒ Copies of IDS Citations

12. ☐ Preliminary Amendment

13. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)

14. ☐ Small Entity Statement(s) ☐ Statement filed in prior application
Status still proper and desired

15. ☐ Certified Copy of Priority Document(s)
(if foreign priority is claimed)

16. ☐ Other: _____

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation

☐ Divisional

☐ Continuation-in-part (CIP)

of prior application No. ____/____

18. CORRESPONDENCE ADDRESS

☒ Customer Number or Bar Code Label

05514
(Insert Customer No. or Attach bar code label here)

or ☐ Correspondence address below

NAME

Address

City

State

Zip Code

Country

Telephone

Fax

+

CLAIMS	(1) FOR	(2) NUMBER FILED	(3) NUMBER EXTRA	(4) RATE	(5) CALCULATIONS
TOTAL CLAIMS (37 CFR 1.16(c))		13-20 =	0	X \$ 18.00 =	\$ 00.00
INDEPENDENT CLAIMS (37 cfr 1.16(b))		4-3 =	1	X \$ 78.00 =	\$ 78.00
MULTIPLE DEPENDENT CLAIMS (if applicable) (37 CFR 1.16(d))				\$260.00 =	\$ 00.00
				BASIC FEE (37 CFR 1.16(e))	\$ 760.00
Total of above Calculations =					\$ 838.00
Reduction by 50% for filing by small entity (Note 37 CFR 1.9, 1.27, 1.28).					
TOTAL =					\$ 838.00

19. Small entity status

- a. ☐ A Small entity statement is enclosed
- b. ☐ A small entity statement was filed in the prior nonprovisional application and such status is still proper and desired.
- c. ☐ Is no longer claimed.


20. ☒ A check in the amount of \$ 838.00 to cover the filing fee is enclosed.

21. ☐ A check in the amount of \$ _____ to cover the recordal fee is enclosed.

22. The Commissioner is hereby authorized to credit overpayments or charge the following fees to Deposit Account No. 06-1205:

- a. ☒ Fees required under 37 CFR 1.16.
- b. ☐ Fees required under 37 CFR 1.17.
- c. ☐ Fees required under 37 CFR 1.18.

SIGNATURE OF APPLICANT, ATTORNEY, OR AGENT REQUIRED

NAME	Lawrence A. Stahl, Reg. No. 30,110
SIGNATURE	
DATE	June 28, 1999

TITLE OF THE INVENTION
IMAGE PROCESSING APPARATUS AND METHOD

BACKGROUND OF THE INVENTION

5

FIELD OF THE INVENTION

The present invention relates to an image processing apparatus such as a copying machine, facsimile, or printer, and an image processing method
10 which can be implemented in the apparatus.

DESCRIPTION OF THE RELATED ART

In the event of short supply of sheets or staples, overload of the delivery tray, or the like,
15 conventional copying machines and printers abort current output jobs.

In many cases, copying machines and printers are shared by a plurality of users. If a copying machine or printer stops upon aborting an output job, other
20 output jobs cannot be executed, resulting in troubling other users.

SUMMARY OF THE INVENTION

25 The present invention has been made to solve the conventional drawbacks, and has as its object to

provide an image processing apparatus capable of realizing high print efficiency without being influenced by job abort.

To achieve the above object, an image processing
5 apparatus according to the present invention is characterized by comprising detection means for detecting the state of a resource used to output an image, prediction means for predicting abort/non-abort of output of image data in accordance with the state of
10 the resource detected by the detection means, output means for suspending output of image data, abort for which is predicted by the prediction means, and storage means for storing output image data when the output means is suspended.

15 When second image data to be output exists in addition to first image data, and abort for which is predicted, the output means preferably outputs the second image data preferentially to the first image data.

20 The output means preferably comprises selection means capable of selecting whether output of image data, abort for which is predicted, is suspended or forcibly performed.

The image processing apparatus preferably further
25 comprises instruction means capable of instructing the selection means to suspend or forcibly perform output

of image data, when abort is predicted.

The image processing apparatus preferably further comprises display means for displaying an abort prediction result by the prediction means.

- 5 When output of image data is suspended, a display means preferably displays a message indicative thereof.

The output means preferably comprises output cancel means for cancelling output of output-suspended image data.

- 10 The image processing apparatus preferably further comprises setting means capable of setting a selection result of the selection means in advance.

- The image processing apparatus preferably further comprises verification means for verifying setting by
15 the setting means.

An image processing method according to the present invention is characterized by comprising

- a storage step of storing image data, a detection step of detecting a state of the resource used to
20 output the image data stored in the storage step, a prediction step of predicting abort/non-abort of output of the image data in accordance with the state of the resource detected in the detection step, and a suspension step of suspending output of the image data,
25 abort of which is predicted in the prediction step.

 An image processing method according to the

present invention is characterized by comprising a storage step of storing image data, a suspension prediction step of comparing the resources necessary for output with the actual resources available for
5 first image data to be outputted first out of image data that is stored in the storage step and are to be outputted, and predicting abort/non-abort of output of the first image data from the comparison result, and an output order change step of, when abort of output is
10 predicted in the abort prediction step, changing the output order so as to output the first image data after second image data which was scheduled to be output after the first image data.

The abort prediction step is performed only when
15 image data to be output in addition to the first image data exists, and the first image data is directly output when no image data to be output in addition to the first image data exists.

A computer-readable memory according to the
20 present invention is characterized by comprising a program module of a detection step of detecting a state of a resource used to output image, a program module of a prediction step of predicting abort/non-bort of output of image data in accordance with the state of
25 the resource detected in the detection step, and a program module of an output step of suspending output

of image data, abort for which is predicted in the prediction step.

Other features and advantages of the present invention will be apparent from the following description taken in conjunction with the accompanying drawings, in which like reference characters designate the same or similar parts throughout the figures thereof.

10 BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a block diagram of a schematic arrangement of an image processing system as the first embodiment according to the present invention;

15 Fig. 2 is a sectional view of a reader unit 103 and printer unit 104 in Fig. 1;

Fig. 3 is a plan view of the outer appearance of an operation unit 102 in Fig. 1;

20 Fig. 4 is a flow chart of an image input control procedure in the first embodiment of the present invention;

Fig. 5 is a flow chart of an image output control procedure in the first embodiment of the present invention;

25 Fig. 6 is a flow chart of a user interface control procedure in the first embodiment of the

present invention;

Fig. 7 is a flow chart of an output prediction control procedure in the first embodiment of the present invention;

5 Fig. 8 is a flow chart of the detailed contents of processing in S509 of Fig. 5 in the second embodiment of the present invention;

Fig. 9 is a flow chart of a user interface control procedure in the second embodiment of the present invention; and

10 Fig. 10 is a flow chart of an image processing procedure in an image processing system according to the third embodiment of the present invention.

15 DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Preferred embodiments of the present invention will be described below in detail with reference to the accompanying drawings. The relative arrangement of constituent elements or program modules and numerical values of resolution and the like are not limited to these embodiments unless otherwise specified.

[First Embodiment]

25 An image processing system to which an image processing method according to the present invention is applied will be described as the first embodiment of

the present invention. In this image processing system, when image data received by a facsimile or image data inputted by a computer or scanner is to be output, whether or not an abort is likely to occur due to
5 shortage of a resource necessary for the output is predicted to improve poor print efficiency caused by an abort.

Fig. 1 is a block diagram showing an arrangement of an image processing system. In Fig. 1, reference
10 numeral 101 denotes a digital copying machine main body including an operation unit 102, reader unit 103, and printer unit 104. The digital copying machine 101 is connected to an image input/output control unit 105, and together constitute a hybrid machine.

15 The operation unit 102 is used to operate the digital copying machine main body 101 and image input/output control unit 105, and operates as a user interface means for communicating with a user.

The reader unit 103 reads an original image and
20 outputs image data corresponding to the original image to the image input/output control unit 105. The image data output to the image input/output control unit 105 is temporarily stored in a hard disk 108 via a control unit 109.

25 The printer unit 104 prints, on a print sheet, an image corresponding to image data read from the hard

disk 108 via the control unit 109.

The image input/output control unit 105 is connected to the copying machine 101, and includes a facsimile unit 106, computer interface unit 107, hard
5 disk 108, and control unit 109.

The facsimile unit 106 expands compressed image data received via a telephone line to transfer the expanded image data to the control unit 109, and compresses image data transferred from the control unit
10 109 to transmit the compressed image data via the telephone line. Compressed image data received by the facsimile unit 106 can be temporarily stored in the hard disk 108.

The computer interface unit 107 is interposed
15 between a personal computer/work station (PC/WS) 110 or a network scanner (a image scanner on a network) 111 and the control unit 109. The computer interface unit 107 maps code data (PDL) representing an image that is transferred from the PC/WS 110 and image data from the
20 network scanner 111 into image data which can be printed by the printer unit 104, and stores the image data in the hard disk 108 via the control unit 109.

The control unit 109 controls data flows between the reader unit 103, facsimile unit 106, computer
25 interface unit 107, and hard disk 108, and comprises a CPU such as a microprocessor, a program memory storing

control programs corresponding to processes (to be described later), a RAM used as a work area by the CPU upon operation, and the like.

Fig. 2 is a sectional view showing the reader unit 103 and printer unit 104. An original feeder 201 of the reader unit 103 feeds originals, from the last page, onto a platen glass 202 one by one, and discharges originals to the platen glass 202 upon completion of a read of the originals. When an original is conveyed onto the platen glass 202, a lamp 203 is turned on, and a scanner unit 204 starts moving to expose and scan the original. At this time, light reflected by the original is guided to a CCD image sensor (to be referred to as a CCD hereinafter) 209 by mirrors 205, 206, and 207 and a lens 208. The image of the original is read by the CCD 209, and image data output from the CCD 209 is subjected to predetermined processing and transferred to the control unit 109 of the image input/output control unit 105.

A laser driver 221 of the printer unit 104 drives a laser-emitting unit 210 and causes the laser-emitting unit 210 emit a laser beam corresponding to image data output from the image input/output control unit 105. The laser beam irradiates a photosensitive drum 211 to form a latent image corresponding to the laser beam on the photosensitive drum 211. A developing agent is

attached to the latent image portion of the
photosensitive drum 211 by a developing unit 212. At
the timing synchronized with the irradiation start of
the laser beam, a print sheet is fed from either
5 cassette 213 or 214 and conveyed to a transfer unit 215,
and the developing agent attached to the photosensitive
drum 211 is transferred to the print sheet. The print
sheet having the developing agent is conveyed to a
fixing unit 216 where the developing agent is fixed to
10 the print sheet by heat and pressure of the fixing unit
216.

The print sheet having passed through the fixing
unit 216 is discharged by discharge rollers 217. A
sorter 220 stores discharged print sheets in its
15 respective bins to sort the print sheets, or staples
the sorted print sheets. If no sorting is set, the
sorter 220 stores print sheets in a top bin. When
double-sided printing is set, a print sheet is conveyed
up to the discharge rollers 217, and the rotational
20 direction of the discharge rollers 217 is reversed to
guide the print sheet to a refeed convey path 219 by a
flapper 218. When multiple printing is set, a print
sheet is guided to the re-feed convey path 219 by the
flapper 218 so as not to convey the print sheet to the
25 discharge rollers 217. The print sheet guided to the
re-feed convey path 219 is fed to the transfer unit 215

at the above-described timing.

The cassettes 213 and 214 are equipped with remaining sheet amount sensors, and the sorter 220 is equipped with a remaining staple amount sensor and delivery tray stack amount sensor (none of them are shown). These sensors monitor the states of corresponding resources.

Fig. 3 shows the key layout of the operation unit 102 of the digital copying machine. Reference numeral 301 denotes a main power lamp which is turned on upon power ON operation. A power switch (not shown) is attached to the side of the main body to control energization to the main body. Reference numeral 302 denotes a preheating key used to set/reset a preheating mode; 303, a copy mode key used to select a copy mode from a plurality of functions; 304, a FAX mode key used to select a FAX mode from a plurality of functions; 305, a print key used to display setting of functions or a print status when the copying machine is used as a printer; and 306, a copy start key used to instruct the start of copy.

Reference numeral 307 denotes a stop key used to cancel or stop coping operation; 308, a reset key used to return to a standard mode during a standby state; 309, a guide key which allows the user to inform the function of each key; 310, a user mode key which the

user uses to change the basic setting of the system;
311, an interrupt key used to perform interrupt copy
during copy; 312, a tenkey pad used to input numerical
values; 313, a clear key used to clear the inputted
5 numerical values; 314, 20 one-touch dial keys used to
dial by one-touch operation for facsimile transmission;
and 315, a pair of lids as double lids hollowed in
accordance with the key shapes of the respective one-
touch dial keys 314. A sensor switch (not shown)
10 detects a first state in which the two lids are closed,
a second state in which only one lid is open, and a
third state in which the two lids are open. Key
operation of the one-touch dial keys 314 is determined
by a combination with the three types of lid open/close
15 states, which yields the same effect as $20 \times 3 = 60$
keys. Reference numeral 316 denotes a touch panel
which is formed by a combination of a liquid crystal
display and touch sensor, displays a setting display
separately for each mode, and allows various detailed
20 settings by touching displayed keys.

Control procedures according to the present
invention will be described with reference to Figs. 4
to 7.

Fig. 4 is a flow chart of an image input control
25 procedure. In S401, an image input processing request
from the reader unit 103, facsimile unit 106, or

computer interface unit 107 is monitored. If an image
input processing request occurs in S401, the flow
shifts to S402. The inputted image is stored in the
hard disk 108 in S402, and added to an image output
5 queue in S403. In S404, the liquid crystal display 316
of the operation unit 102 displays that an image has
been inputted, and the personal computer/work station
(PC/WS) 110 is informed of this via the computer
interface unit 107. Then, the personal computer/work
10 station (PC/WS) 110 displays that an image has been
input. The flow returns to S401 to monitor an image
input request.

Fig. 5 is a flow chart showing an image output
control procedure. In S501, data added to the image
15 output queue in S403 is monitored. If data exists in
the queue, the flow advances to S502 to check the
output conditions of the image data to be output and a
main body status. In S503, it is checked based on data
in S502 and the detection results of various sensors
20 whether abort of output is likely to occur due to the
lack of staples or sheets, stack-over of the delivery
tray, or the like. Details in S502 and S503 will be
explained in an output prediction control procedure in
Fig. 7.

25 If YES in S503, the flow shifts to S504; if NO,
to S508. If the flow shifts to S508, a message

indicating output abort, and the reason of abort (which resource is short, or the like) is displayed. The personal computer/work station (PC/WS) 110 is also informed of this status via the computer interface unit

5 107. At the same time, a user input designating whether to forcibly output the job, abort for which is predicted, or wait (S509). If there is no input upon the lapse of a predetermined time (e.g., 10 sec), the flow advances to S510 to extract the data from the

10 image output queue and re-register it as an output reserve job at the end of the queue.

The flow shifts to S511 to display a message which indicates that output of the image has been postponed because output abort of the image is

15 determined, and includes the reason for abort on the liquid crystal display 316 on the operation unit 102. The personal computer/work station (PC/WS) 110 is also informed of this status via the computer interface unit

107. The personal computer/work station (PC/WS) 110

20 displays the reason of output abort of the output image, and the current output job. The flow returns to S501 to monitor output data. If YES in S509, the flow shifts to S504.

If the flow shifts to S504, image data at the

25 start of the queue is outputted. If the flow shifts from S509 to S504 and the output operation aborts

during the outputting of the image, this status is displayed, informed, and warned to request replenishment of a corresponding resource. If it is confirmed that the user has replenished the short
5 resource, the flow restarts the output and shifts to S505 upon completion of the image output job.

The output data is removed from the output queue in S505, and the stored image data is deleted from the hard disk 108 in S506. The flow advances to S507 to
10 display a message indicative of the image output on the liquid crystal display 316 on the operation unit 102. The personal computer/work station (PC/WS) 110 is informed of image output via the computer interface unit 107. The personal computer/work station (PC/WS)
15 110 displays a message to this effect. The flow returns to S501 to monitor an image output request.

Fig. 6 is a flow chart of a user interface control procedure. An event is monitored in S601, and whether or not an output queue display request has
20 occurred is checked in S602. If YES in S602, the flow shifts to S603; if NO, to S604. If the flow shifts to S603, the contents of the requested output queue are displayed on the liquid crystal display 316 on the operation unit 102, and the display request is also
25 sent to the personal computer/work station (PC/WS) 110 via the computer interface unit 107. The flow returns

to S601 to monitor for subsequent action.

If the flow shifts to S604, whether or not the user performs a key input on the operation unit 102 or personal computer/work station (PC/WS) 110 is checked.

- 5 If NO in S604, the flow returns to S601; if YES, to S605. In S605, whether or not the key input designates to cancel the job is checked. If YES in S605, the flow advances to S606; if NO, to S608.

- 10 If the flow advances to S606, the designated data is removed from the output queue, the stored image data is deleted from the hard disk 108 in S607, and the flow advances to S612. In S612, cancelling of the image is displayed on the liquid crystal display 316, on the operation unit 102, and on the personal computer/work
15 station (PC/WS) 110 via the computer interface unit 107. The flow returns to S601 to monitor an image output request.

- If the flow advances to S608, whether the key input in S604 designates to forcibly output the job is
20 checked. If YES in S608, the flow shifts to S609; if NO, returns to S601.

- If the flow shifts to S609, image data at the start of the queue is output, the output data is removed from the output queue in S610, and the stored
25 image data is deleted from the hard disk 108 in S611. The flow advances to S612 to display on the liquid

crystal display 316 on the operation unit 102 that an image has been outputted. The personal computer/work station (PC/WS) 110 is informed of this status via the computer interface unit 107. Then, the personal

5 computer/work station (PC/WS) 110 displays a message to this effect. The flow returns to S601 to monitor an image output request.

Fig. 7 is a flow chart of an output prediction control procedure. If an output prediction request
10 occurs, the number of sheets used by the output job, and the remaining sheet amounts in the cassettes 213 and 214 are checked in S701. Whether or not the remaining sheet amounts are sufficient is checked in S702. If YES in S702, the flow shifts to S703; if NO,
15 to S708. In S703, the stack amount of the delivery tray in the sorter 220 is checked, and in S704 whether or not output of all image data of the output job would cause an overload is checked. If YES in S704, the flow shifts to S705; if NO, to S708. In S705, whether or
20 not the output job uses the stapler of the sorter 220 is checked. If NO in S705, the flow shifts to S709; if NO, to S706. If the flow shifts to S706, the remaining amount of staple of the sorter 220 and the number of staples used by the output job are checked, and whether
25 or not staples are sufficient for the output job is checked in S707. If YES in S707, the flow shifts to

5 S709; if NO, to S708. In S708, the output prediction request source is informed that abort of the output job is determined. If the flow shifts to S709, the output prediction request source is informed that abort of the output job is not determined.

Note that the numbers of sheets and staples used in the output job are determined based on setting information of the output job.

10 As described above, according to the first embodiment, abort of an output job is predicted, and a job where abort is not predicted can be outputted preferentially to a job where abort is predicted. Therefore, the print efficiency can be enhanced.

15 Since a job set as an output reserve job and the reason are displayed on the user interface, the user can be informed that the output job as been placed as an output reserve job and the reason, thereof.

20 Further, the user can cancel an output-aborted job through the user interface. Thus, when the user cannot expect a desired output, the job can be cancelled to reduce wasteful consumption of sheets or toner.

25 On the other hand, the user can forcibly output a job. When the user can quickly replenish a resource which has been the cause of output abort, the situation can be corrected and thereafter quickly attain the

output job.

[Second Embodiment]

An image processing system to which an image processing method according to the present invention is applied will be described as the second embodiment of the present invention. In the first embodiment, when abort of a job output is predicted, a forcible output instruction is awaited, and if no instruction is inputted, the job is set as an output reserve job. To the contrary, the image processing system as the second embodiment can set in advance whether or not a job is forcibly output or postponed as an output reserve job. More specifically, the second embodiment is different from the first embodiment by the processing in S509 of Fig. 5 and the control procedure in Fig. 6. The remaining control procedures and hardware arrangement are the same as in the first embodiment, and a description thereof will be omitted.

Fig. 8 is a flow chart showing the detailed contents of processing in S509 of Fig. 5 in the second embodiment.

If abort of an output job is determined in S503 of Fig. 5, processing starts from S801 after the abort prediction is displayed (S508). In S801, the forcible output setting is determined. If the job is set to forcibly output setting, the flow shifts to S802; if

the job is set as an output reserve job, to S805.

If the flow shifts to S802, verification as to whether or not to forcibly output the job is requested from the user on an operation unit 102 or personal
5 computer/work station (PC/WS) 110, and verification is checked in S803. If YES in S803, the flow shifts to S504; if NO, to S510. If the flow shifts to S504, image output processing is done to output the image of the output job.

10 If the flow shifts to S805, verification as to whether or not to set the job as an output reserve job is requested from the user on the operation unit 102 or personal computer/work station (PC/WS) 110, and verification is checked in S806. If YES in S806, the
15 flow shifts to S510; if NO, to S504. In S510, output reserve processing is done to set the output job as an output reserve job.

Fig. 9 is a flow chart showing a user interface control procedure in the second embodiment. The steps
20 from S601 to S612 are the same as in Fig. 6. In S608, if the key input in S604 is determined as not to designate a forcible job output, the flow shifts to S613.

In S613, it is checked whether or not the key
25 input designates a change in setting of processing operation when abort of the output job is predicted.

embodiment, and a description thereof will be omitted.

Fig. 10 is a flow chart showing an image processing procedure in the image processing system of the third embodiment. In Fig. 10, the same processes are done in the same steps as in Fig. 5. In S501, data added to an output queue is monitored. If data exists in the queue, the flow shifts to S512 to check whether or not a plurality of such data exist in the queue. If YES in S512, the flow shifts to S502 to perform abort prediction processing; if NO, to S504 to output the corresponding image data in the queue. In S503, it is checked based on data in S502 and the detection results of various sensors whether or not the output job is likely to abort due to the absence of staples or sheets, overload of the delivery tray, or the like.

If YES in S503, the flow shifts to S504; if NO, to S508. The remaining processing is the same as in Fig. 5, and a description thereof will be omitted.

If NO in S503, the flow may jump to S510 skipping S508 and S509 to always set the job as an output reserve job.

According to the third embodiment, when only one output waiting job exists, no abort prediction is done. Abort prediction can be done only when abort is expected to trouble other jobs, resulting in efficient processing.

[Other embodiments]

The present invention may be applied to a system constituted by a plurality of devices (e.g., a host computer, an interface device, a reader, and a printer) 5 or an apparatus comprising a single device (e.g., a copying machine, or a facsimile apparatus).

In the above embodiments, the program of processing in each flow chart is stored in the program memory of the control unit 109. However, the object of 10 the present invention is realized even by supplying a storage medium storing software program codes for realizing the functions of the above-described embodiments to a system or apparatus, and causing the computer (or a CPU or an MPU) of the system or apparatus 15 to read out and execute the program codes stored in the storage medium.

In this case, the program codes read out from the storage medium realize the functions of the above-described embodiments by themselves, and the storage 20 medium storing the program codes constitutes the present invention.

As a storage medium for supplying the program codes, a floppy disk, hard disk, optical disk, magneto-optical disk, CD-ROM, CD-R, magnetic tape, 25 nonvolatile memory card, ROM, or the like can be used.

The functions of the above-described embodiments

are realized not only when the readout program codes are executed by the computer but also when the OS (Operating System) running on the computer performs part or all of actual processing on the basis of the instructions of the program codes.

The functions of the above-described embodiments are also realized when the program codes read out from the storage medium are written in the memory of a function expansion board inserted into the computer or a function expansion unit connected to the computer, and the CPU of the function expansion board or function expansion unit performs part or all of actual processing on the basis of the instructions of the program codes.

When the present invention is applied to the above storage medium, program codes corresponding to the above-described flow charts are stored in this storage medium. This will be briefly described. At least program codes of a program mode of the detection step of detecting the state of a resource used to output an image, a program module of the prediction step of predicting abort/non-abort of output of image data in accordance with the state of the resource detected in the detection step, and a program module of the output step of suspending output of image data, abort of which is predicted in the prediction step are stored in the storage medium.

00227041-00000000

The image processing apparatus according to the present invention can suspend output of image data, abort of which is predicted owing to the absence of sheets or staples, overload of the delivery tray, or the like. When output conditions are satisfied, the output can restart. As a result, the copy or printout efficiency can be enhanced to decrease the number of output jobs that are abandoned because of undesirable outputs.

10 Since image data is stored, it can be easily, quickly output.

The present invention has been exemplified by preferred embodiments, but is not limited to the above embodiments, and can be variously modified within the spirit and scope of the invention.

15

As many apparently widely different embodiments of the present invention can be made without departing from the spirit and scope thereof, it is to be understood that the invention is not limited to the specific embodiments thereof except as defined in the appended claims.

20

WHAT IS CLAIMED IS

1. An image processing apparatus comprising:

detection means for detecting the state of a resource used to output image data;

5 prediction means for predicting whether or not to abort the outputting of the image data in accordance with the state of the resource detected by said detection means;

output control means for suspending outputting of
10 the image data, if abort is predicted by said prediction means; and

storage means for storing the output image data which said output control means has suspended.

2. The apparatus according to claim 1, wherein when
15 second image data to be output exists in addition to first image data for which abort is predicted, said output means outputs the second image data preferentially to the first image data.

3. The apparatus according to claim 1, wherein said
20 output control means comprises selection means capable of selecting whether or not to suspend output image data, for which abort is predicted or forcibly perform outputting.

4. The apparatus according to claim 3, wherein said
25 instruction means capable of instructing said selection means to suspend or forcibly perform output of image

data, for which abort is predicted.

5. The apparatus according to claim 1, further comprising display means for displaying an abort prediction result by said prediction means.

5 6. The apparatus according to claim 5, wherein when output of image data is suspended, said display means displays a message indicative thereof.

7. The apparatus according to claim 1, wherein said output means comprises output cancel means for
10 cancelling output of output-suspended image data.

8. The apparatus according to claim 3, further comprising setting means capable of setting a selection result of said selection means in advance.

9. The apparatus according to claim 8, further
15 comprising verification means for verifying setting of said setting means.

10. An image processing method comprising:
a storage step of storing image data;
a detection step of detecting the state of a
20 resource used to output the image data stored in the storage step;

a prediction step of predicting whether or not to abort the outputting of the image data in accordance with the state of the resource detected in the
25 detection step; and

the suspension step of suspending outputting of

the image data, if abort is predicted in the prediction step.

11. An image processing method comprising:

a storage step of storing image data;

- 5 an abort prediction step of comparing a resource necessary for outputting with an actual resource for first image data to be output first out of image data that are stored in the storage step and to be output, and predicting whether or not to abort the outputting
- 10 of the first image data from the comparison result; and an output order change step of, when abort of output is predicted in the abort prediction step, changing an output order so as to output the first image data after second image data was scheduled to be
- 15 outputted after the first image data.

12. The method according to claim 11, wherein the abort prediction step is performed only when image data to be output exists in addition to the first image data, and the first image data is directly output when no
- 20 image data to be output exists in addition to the first image data.

13. A computer-readable memory comprising:

a program module of a detection step of detecting a state of a resource used to output image data;


- 25 a program module of a prediction step of predicting whether or not to abort the outputting of

the image data in accordance with the state of the
resource detected in the detection step; and

a program module of an output step of suspending
outputting of the image data, if abort is predicted in
5 the prediction step.

ABSTRACT OF THE DISCLOSURE

A method to enhance the copy or printout efficiency and decrease the number of output jobs that are abandoned because of undesirable outputs. Abort of output due to absence of sheets or staples, overload of a delivery tray, or the like is predicted. If output abort is determined, data is removed from an output queue and re-registered as an output reserve job at the end of the queue.

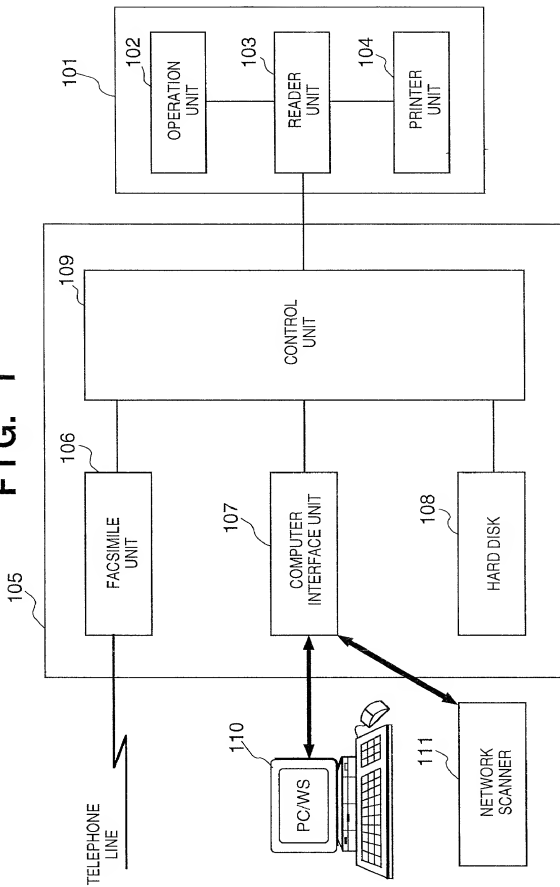FIG. 1

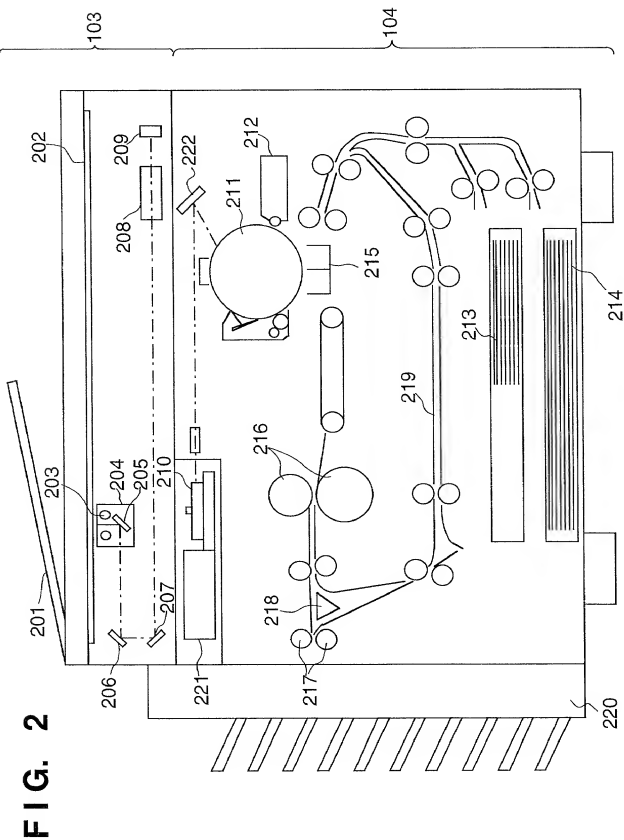


FIG. 3

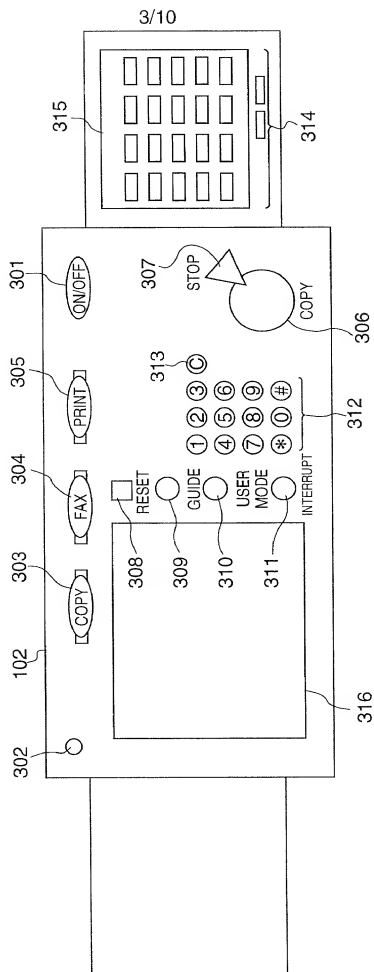


FIG. 4

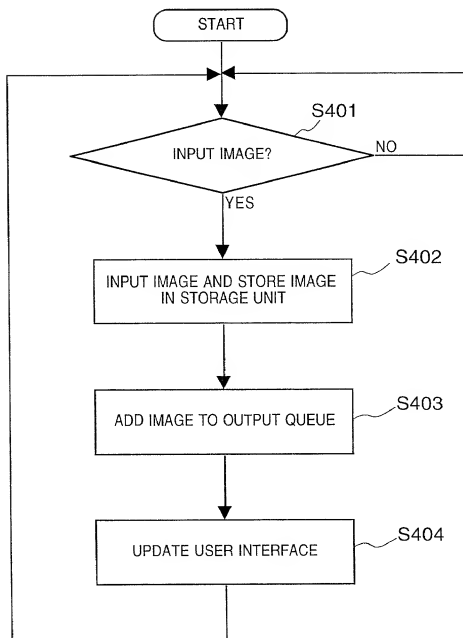


FIG. 5

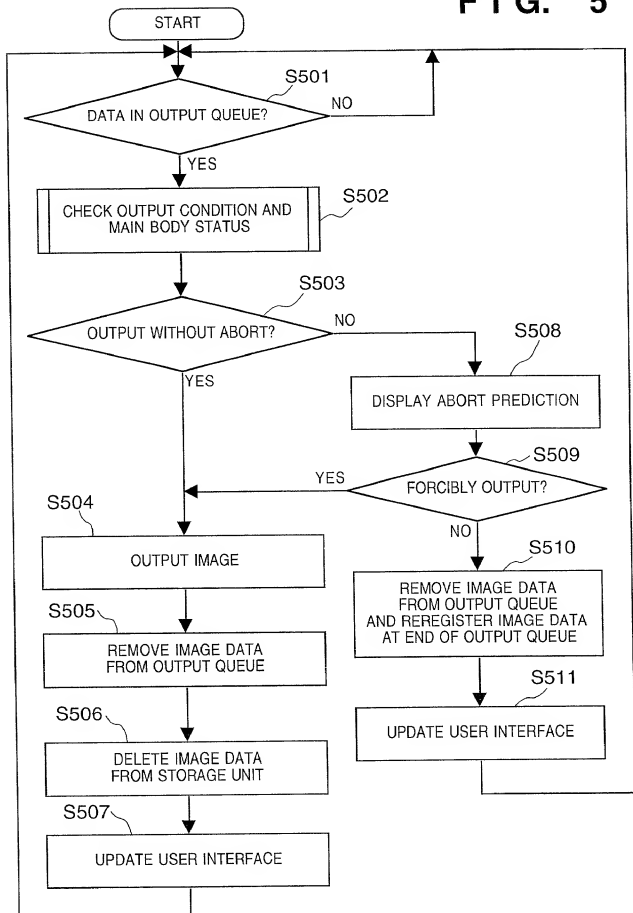
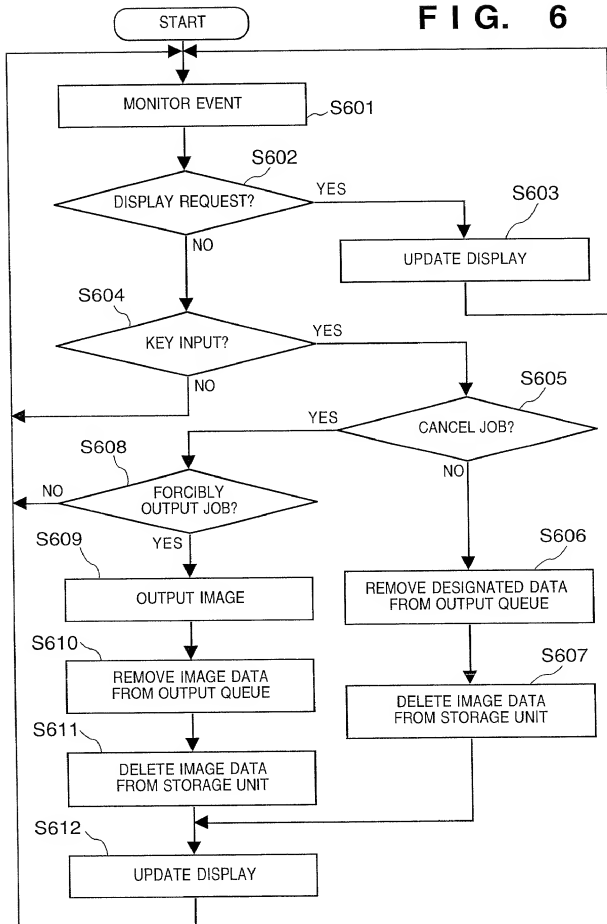


FIG. 6



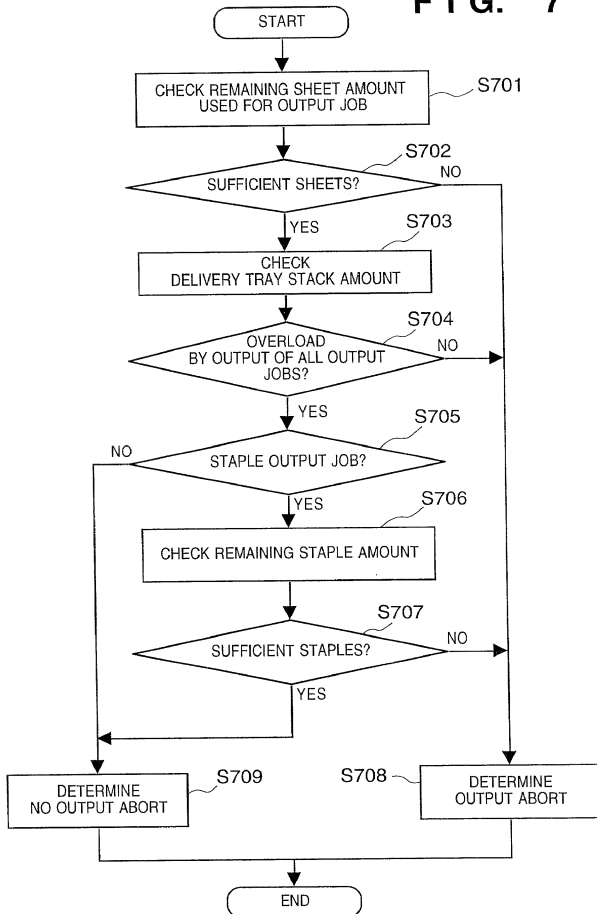
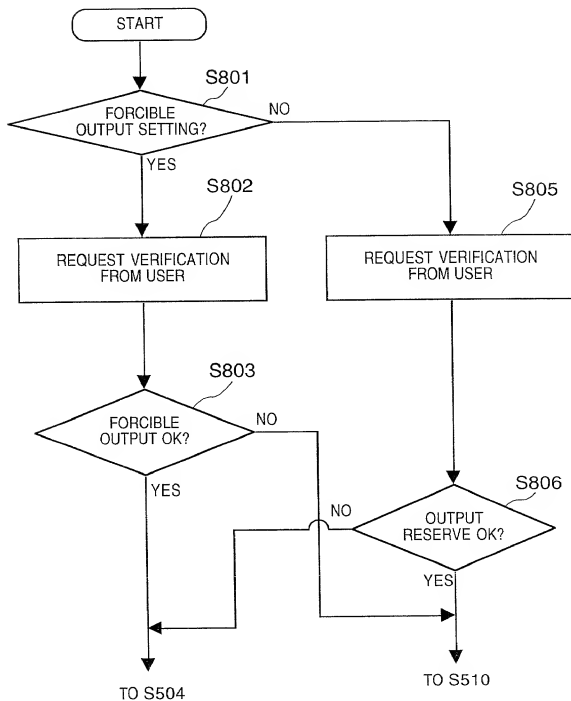


FIG. 8




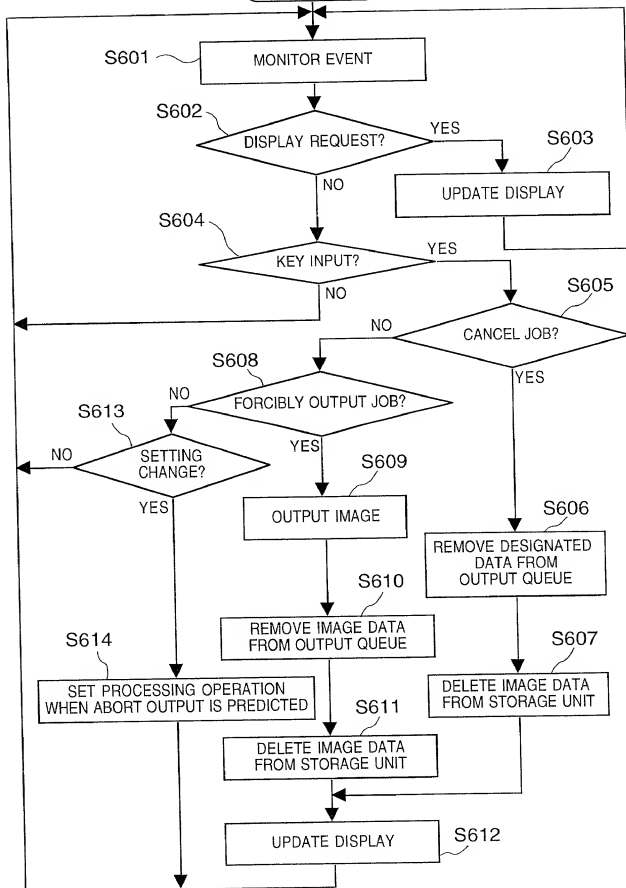


FIG. 10

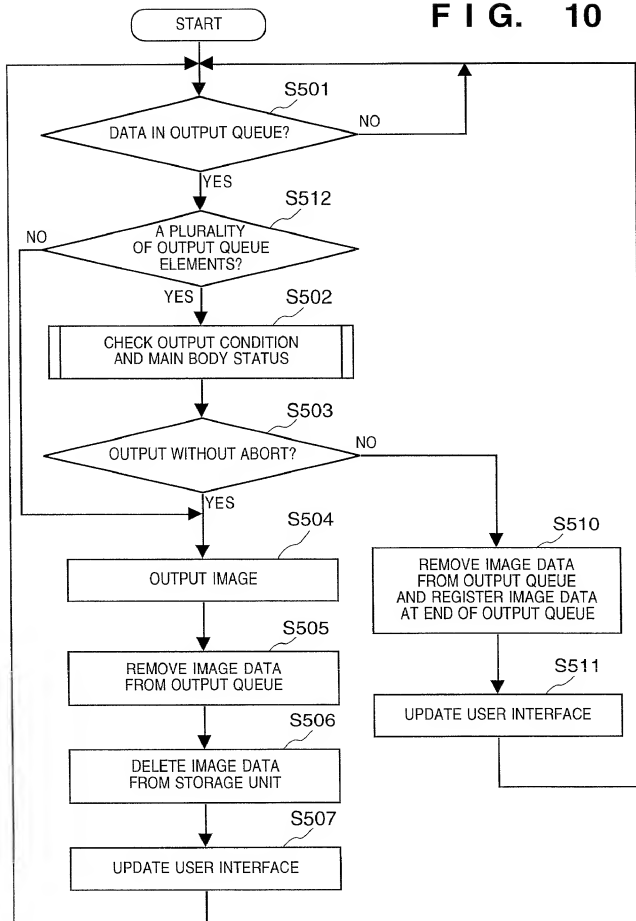

COMBINED DECLARATION AND POWER OF ATTORNEY
FOR PATENT APPLICATION

(Page 1)

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name;

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

IMAGE PROCESSING APPARATUS AND METHOD

the specification of which ☒ is attached hereto ☐ was filed on _____ as United States Application No. or PCT International Application No. _____ and was amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR §1.56.

I hereby claim foreign priority benefits under 35 U.S.C. §119(a)-(d) or §365(b), of any foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT international application which designates at least one country other than the United States, listed below and have also identified below any foreign application for patent or inventor's certificate, or PCT international application having a filing date before that of the application on which priority is claimed:

Country	Application No.	Filed (Day/Mo./Yr.)	(Yes/No) Priority Claimed
Japan	10-185017	30 June 1998	Yes

I hereby claim the benefit under 35 U.S.C. § 120 of any United States application(s), or § 365(c) of any PCT international application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 C.F.R. § 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

Application No.	Filed (Day/Mo./Yr.)	Status (Patented, Pending, Abandoned)
-----------------	---------------------	------------------------------------------

I hereby appoint the practitioners associated with the firm and Customer Number provided below to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith, and direct that all correspondence be addressed to the address associated with that Customer Number:

FITZPATRICK, CELLA, HARPER & SCINTO
Customer Number: 05514

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Sole or First Inventor BUNGO SHIMADA

Inventor's signature _____

Date _____ Citizen/Subject of JAPAN

Residence c/o Canon Bonuru Shimomaruko, 12-20, Shimomaruko 1-chome, Ohta-ku, Tokyo, Japan

Post Office Address c/o CANON KABUSHIKI KAISHA, 30-2, Shimomaruko 3-chome, Ohta-ku, Tokyo, Japan

COMBINED DECLARATION AND POWER OF ATTORNEY
FOR PATENT APPLICATION

(Page 2)

Full Name of Second Joint Inventor, if any HIROSHI SUMIO

Second Inventor's signature _____

Date _____ Citizen/Subject of JAPAN

Residence 8-16-202, Kitasenzoku 1-chome, Ohta-ku, Tokyo, Japan

Post Office Address c/o CANON KABUSHIKI KAISHA, 30-2, Shimomaruko
3-chome, Ohta-ku, Tokyo, Japan

Full Name of Third Joint Inventor, if any HIROHIKO ITO

Third Inventor's signature _____

Date _____ Citizen/Subject of JAPAN

Residence 4-3-103, Sumiregaoka, Tsuzuki-ku, Yokohama-shi,
Kanagawa-ken, Japan

Post Office Address c/o CANON KABUSHIKI KAISHA, 30-2, Shimomaruko
3-chome, Ohta-ku, Tokyo, Japan

Full Name of Fourth Joint Inventor, if any NOBUAKI MIYAHARA

Fourth Inventor's signature _____

Date _____ Citizen/Subject of JAPAN

Residence c/o Canon Bonuru Shimomaruko, 12-20, Shimomaruko 1-chome,
Ohta-ku, Tokyo, Japan

Post Office Address c/o CANON KABUSHIKI KAISHA, 30-2, Shimomaruko
3-chome, Ohta-ku, Tokyo, Japan